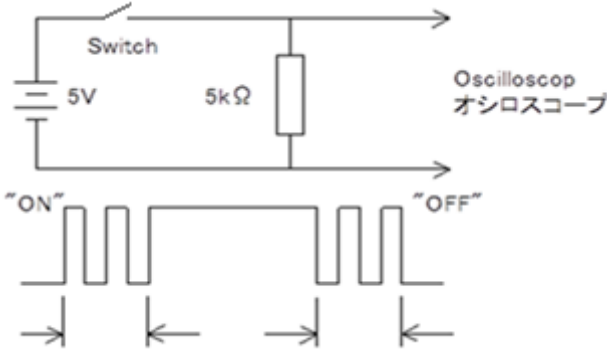


DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 1 / 14
BACKGROUND		DATE : Oct,2025

1	General	
1.1	Application	This specification is applied to low current circuit TACT Switch™ used for general electronic equipment.
1.2	Operating temperature range	-40 to 90 °C (normal humidity, normal air pressure) Operating temperature range shall refer to the range where this switch keeps electrical makes ”ON”/”OFF” within such temperature.
1.3	Storage temperature range	At switch level : -40 to 90 °C (normal humidity, normal air pressure) Switch on Taping : -20 to 50 °C (Relative humidity : 20 to 85 %)
1.4	Test Condition	Unless otherwise specified, measurements and tests shall be done under the atmospheric conditions as follows. Normal temperature : (Temperature 5 to 35 °C) Normal humidity : (Relative humidity 25 to 85 %) Normal air pressure : (Air pressure 86 to 106 kPa) If any doubts arise from judgement, tests shall be conducted under the following conditions. Ambient temperature : 20±2 °C Relative humidity : 60 to 70 % Air pressure : 86 to 106 kPa Switch shall be mounted on PWB without any indication of switch floating.
2	Appearance, Design, and dimensions	
2.1	Appearance	There shall be no defects that affect the functionality of the switch.
2.2	Design and dimensions	Refer to the Product Drawing.
3	Type of actuation	Tactile feedback
4	Circuit	Single Pole, Single Throw (Circuit details is given in the assembly Product Drawings)
5	Rating	
5.1	Absolute maximum ratings	12 V DC 50 mA (Resistive load)
5.2	Minimum ratings	1 V DC 10 μA (Resistive load)

DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 2 / 14
BACKGROUND		DATE : Oct,2025

6. Electrical specification

	Items	Test conditions	Criteria
6.1	Contact resistance	Apply the below static load to the center of the switch operation. The measurement shall be done under the below conditions. 3 times push shall be done before the measurement. (1) Test force : 6.86 N (2) Measuring method : 1 kHz small-current contact resistance meter or voltage drop method at 5VDC 10mA.	100 mΩ Max.
6.2	Insulation resistance	The measurement shall be done under the below conditions. (1) Test voltage : 100 V DC for 1 min. (2) Applied position : Between all terminals. And if there is a metal frame, between terminals and ground(frame)	100 MΩ Min.
6.3	Voltage proof	The measurement shall be done under the below conditions. (1) Test voltage : 250 V AC (50 to 60Hz) (2) Duration : 1 min (3) Applied position : Between all terminals. And if there is a metal frame, between terminals and ground(frame)	There shall be no breakdown.
6.4	Bounce	Lightly press the center of the switch operation at the rate of 3 to 4 push per second, the bounce measurements at switch makes “ON” and “OFF” shall be done respectively. 	“ON” bounce 10ms Max.. “OFF” bounce 10ms Max.


DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 3 / 14
BACKGROUND		DATE : Oct,2025

7. Mechanical specification

	Items	Test conditions	Criteria
7.1	Operating force	Place the switch such that the direction of switch operation is vertical. Then, apply the below force to the center of the switch operation. Measure the maximum force that the switch makes "ON". 3 times push shall be done before the measurement. (1) Test force : 6.86 N (2) Measurement speed : 0.5mm/s	3.43 ± 0.88 N
7.2	Travel	Place the switch such that the direction of switch operation is vertical. Then, apply the below force to the center of the switch operation. Measure the travel distance that the switch makes "ON". 3 times push shall be done before the measurement. (1) Test force : 6.86 N (2) Measurement speed : 0.5mm/s	0.55 ± 0.25 mm
7.3	Return force	Place the switch such that the direction of switch operation is vertical. Then, apply the below force to the center of the switch operation, Measure the force that the center of the switch operation returns to the initial position. 3 times push shall be done before the measurement. (1) Test force : 6.86 N (2) Measurement speed : 0.5mm/s	0.49 N Min.
7.4	Stop strength	Place the switch such that the direction of switch operation is vertical. Then, apply the below force to the center of the switch operation. (1) Test force : 49 N (2) Time: 15 s	There shall be no sign of damage mechanically and electrically.
7.5	Stem strength	Place the switch such that the direction of switch operation is vertical. Then, apply the pull force to the stem in the opposite direction of the switch operation.	2.94 N

DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 4 / 14
BACKGROUND		DATE : Oct,2025

8. Environmental specification

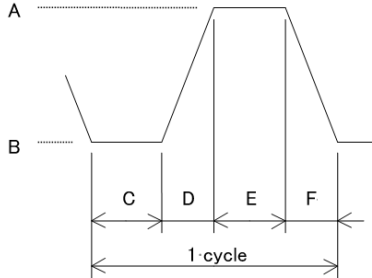
	Items	Test conditions	Criteria
8.1	Cold resistance	After exposed to the below test conditions, the switch is stabilized at normal temperature and humidity conditions for 1 hour. Then, the measurements shall be done. (1) Temperature : -40 ± 2 °C (2) Time : 1000 h (3) Waterdrops shall be removed.	Item 6. Item 7.1 Item 7.2
8.2	Heat resistance	After exposed to the below test conditions, the switch is stabilized at normal temperature and humidity conditions for 1 hour. Then, the measurement shall be done. (1) Temperature : 90 ± 2 °C (2) Time : 1000 h	Item 6. Item 7.1 Item 7.2
8.3	Humidity resistance	After exposed to the below test conditions, the switch is stabilized at normal temperature and humidity conditions for 1 hour. Then, the measurements shall be done. (1) Temperature : 60 ± 2 °C (2) Time : 1000 h (3) Relative humidity : 90 to 95 % (4) Waterdrops shall be removed.	Item 6.1: 200 mΩ Max. Item 6.2: 10 MΩ Min. Item 6.3 Item 6.4 Item 7.1 Item 7.2
8.4	Thermal cycling resistance	After exposed to the below test conditions, the switch is stabilized at normal temperature and humidity conditions for 1 hour. Then, the measurements shall be done. Waterdrops shall be removed.  A= +90 °C B= -40 °C C= 2 h D= 1 h E= 2 h F= 1 h (1) Number of cycles : 166 cycles	Item 6. Item 7.1 Item 7.2
8.5	Protection IP6X equivalent	•Dust protection After exposed to the below test conditions, the measurements shall be done. (1) Amount of talc : 2 kg/m ³ (2) Time of circulation : 8 h (3) Simply leave switch itself inside dust chamber. (4) Dust shall be removed.	Item6.1 No penetration of dusts shall be found inside of switch.
8.6	IPX7	•Water protection After exposed to the below test conditions, the switch is stabilized at normal temperature and humidity conditions for 1 hour. Then, the measurements shall be done. (1) Depth of Immersion: 1m (Height from the top of switch and water surface) (2) Duration of Immersion; 30 min (3) Simply leave switch itself inside water chamber. (4) Water drops shall be removed.	Item 6.2 No outstanding penetration of water which effects the functionality of switch.
8.7	Resistance to hydrogen sulfide gas.(H ₂ S)	After exposed to the below test conditions, the switch is stabilized at normal temperature and humidity conditions for 1 hour. Then, the measurements shall be done. (1) Concentration of H ₂ S gas : 1 ppm (2) Temperature: 40 °C (3) Relative humidity: 75 % (4) Time: 240 h	Item 6.1: 1 Ω Max.

DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 5 / 14
BACKGROUND		DATE : Oct,2025

8.8	Resistance to sulfur dioxide. (SO ₂)	After exposed to the below test conditions, the switch is stabilized at normal temperature and humidity conditions for 1 hour. Then, the measurements shall be done. (1) Concentration of SO ₂ gas : 10 ppm (2) Temperature : 40 °C (3) Relative humidity : 75 % (4) Time : 240 h	Item 6.1: 1 Ω Max.
-----	---	--	--------------------


DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 6 / 14
BACKGROUND		DATE : Oct,2025

9. Endurance specification

	Items	Test conditions	Criteria
9.1	Operation life	After exposed to the below test conditions, the measurements shall be done. (1) 12 V DC 50 mA (Resistive load) (2) Rate of operation : 2 to 3 operations per s (3) Test force: 4.31 N (4) Life cycles:100,000cycles	Item 6.1: 200 mΩ Max. Item 6.2: 10 MΩ Min. Item 6.3 Item 6.4 Item 7.1: -30 to +30 % of initial force Item 7.2
9.2	Vibration resistance	After exposed to the below test conditions, the measurements shall be done. (1) Vibration frequency range: 10 to 55 Hz (2) Total amplitude: 1.5 mm (3) Sweep ratio: 10-55-10 Hz Approx. 1 min (4) Method of changing the sweep vibration frequency: Logarithmic or uniform Logarithmic or uniform (5) Direction of vibration: Three mutually perpendicular directions, including the direction of the switch operation. Three mutually perpendicular directions, including the direction of the travel (6) Duration : 2 h each(6 h in total)	Item 6.1 Item 7.1 Item 7.2
9.3	Shock resistance	After exposed to the below test conditions, the measurements shall be done. (1) Acceleration: 981 m/s ² (2) Acting time: 6 ms (3) Test direction: 6 directions (4) Number of shocks:3 times per direction (18 times in total) 	Item 6.1 Item 7.1 Item 7.2

DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 7 / 14
BACKGROUND		DATE : Oct,2025

10. Soldering conditions

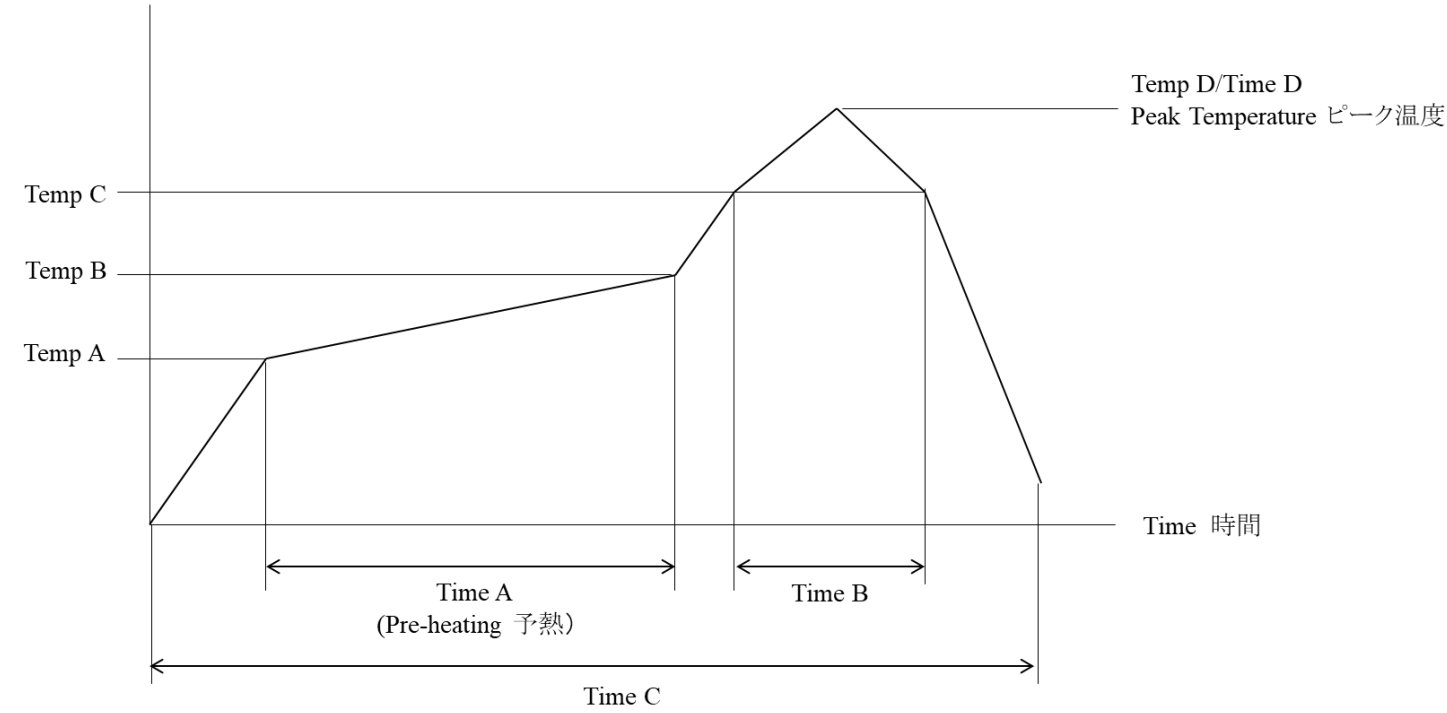	Items	Recommended conditions
10.1	Hand soldering	Hand soldering shall follow the below conditions. (1) Soldering temperature : 350 °C Max. (2) Continuous soldering time : 3 s Max. (3) Capacity of soldering iron : 60 W Max. (4) Excessive pressure shall not be applied to the terminal.
10.2	Reflow soldering	Reflow soldering shall follow the below conditions. (1) Temperature profile Temperature of switch surface 部品表面温度 (°C)  • Each parameter Temp A= 150°C Temp B = 180°C Temp C= 230°C Temp D = 260°C Max. Time A= 120s Max. Time B = 40s Max. Time C = 3 to 4 min Max. Time D = 3s Max. (2) Allowable reflow cycles: 2 cycles Max. (The temperature shall go down to a normal temperature in prior to exposure to the second cycle :)
10.3	Other precautions for soldering	(1) Switch terminals and top face of PWB shall be free from flux in prior to soldering. (2) No cleaning with solvent or like shall be made after the soldering process. (3) Recommended solder paste : M705-GRN360-K2-V(SENJU METAL INDUSTRY CO.,LTD) or equivalent (4) No through holes shall be located underneath and/or near the switch. If reflow process of this switch is follow by wave/flow soldering for chip components on the backside of PWB, flux potentially may penetrate into the switch along the side of housing due to flux ejection. (5) The prior verification is needed, as the soldering conditions may vary depending on reflow chambers. (6) Switch may have degradation in click feeling due to repeated reflow heat stress. Reflow soldering should be performed. Under shortest duration and at lowest temperature as possible. (7) Safeguard the switch assembly against flux penetration from its top side of switch. (8) The thickness of solder paste: 0.15 mm

DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 8 / 14
BACKGROUND		DATE : Oct,2025

【Precaution in use】 The below pre-caution in use shall be met in using this switch. All details stated in this specification must be well considered for the module design. We are not liable for any damage and/or claims related with the below case: Use this switch outside the absolute max rating and/or precaution in use specified in this product specification. Any specification and/or test conditions outside this product specification must be verified per our full part number. In such case, please contact the sales representative in advance. Please also verified it with the actual samples at your module level. For export of this switch, respective laws and/or regulations shall be fully met. Necessary approval or permission must be obtained upon need. This switch must not be used for military and/or antisocial purposes such as terrorism and shall not be supplied to any party intending to use the products for such purposes. Unless provided otherwise, this switch has been designed and manufactured for application to equipment and devices which are sold to end-users in the market, such as AV (audio visual) equipment, home electric equipment, office and commercial electronic equipment, information and communication equipment or amusement equipment. This switch is not intended for use in, and must not be used for, any application of nuclear equipment, driving control equipment for aerospace or any other unauthorized use. With the exception of the above-mentioned banned applications, for applications involving high levels of safety and liability such as medical equipment, burglar alarm equipment, disaster prevention equipment and undersea equipment, please contact an Alps Alpine sales representative and/or evaluate the total system on the applicability. Also, implement a fail-safe design, protection circuit, redundant circuit, malfunction protection and/or fire protection into the complete system for safety and reliability of the total system. In case of using non-automotive rated switches in automotive applications, please contact an Alps Alpine sales representative in advance. The specification will be invalid if we do not get an approval or no orders within one year after we issued specification. Not-specified dimensions and/or other than switch characteristics may be subject to any changes for our convenience. TACT Switch™ is trademark or registered trademark of Alps Alpine Co., Ltd.

DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 9 / 14
BACKGROUND		DATE: Oct,2025

A. 【Safety precautions】

A1. This switch must be used within the stated rating and specification. Use outside the absolute maximum rating and specification (higher force, durability life and environmental conditions) may cause the following failure modes:

- Malfunction due to degraded insulation, and/or
- Damaged contact area due to abnormal heat generation

* Absolute Maximum rating: The maximum voltage and current that must not be exceeded at any moment. This includes transient voltage such as surge and transient current such as inrush current.

Also, this switch must be used above the absolute minimum voltage and current.

*Absolute Minimum rating: The minimum voltage and current that switch needs for stable electrical conduction. Use below such rating may cause unstable contact and contact failure.

A2. The circuit diagram specified in the product drawing shall be fully met. If wrongly connected, this switch may have a risk of malfunction and/or damages caused by short circuit.

A3. When mounting, removing and/or wiring this switch, the switch shall not be energized. There is a risk of electrical shock and/or damages from short circuit.

A4. Upon need, please use protective circuit or redundant circuit.

A5. This switch durability and/or performance is largely affected by applied voltage and current, push speed and/or actual usage. Please verify it with the actual samples under the actual usage conditions that there is no risk of electrical shock and/or damages from short circuit. Use this switch within the life cycles verified at the module level under the actual conditions.

A6. The flammability grade of plastic resin used in this switch is UL94HB. There is a risk of catching a fire.

A7. This switch shall not be disassembled or remodeled. Do not drop this switch. There is a risk of causing degraded performance, electrical shock, and/or burn-out.

A8. This switch must not be used in the atmosphere where flammable gas and/or explosive gas exist. There is a risk of sparking, thermal ignition and/or explosion when switch is operated. Under the actual usage conditions, there is a risk that unexpected accidents may occur. So, please confirm safety by the actual usage conditions.

A9. Under the actual usage condition, there is a risk that unexpected accidents may occur. Safety needs to be verified with the samples under the actual usage conditions.


DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 10 / 14
BACKGROUND		DATE : Oct,2025

B. 【Circuit design】		
B1. This switch is designed for limited to DC resistive load. If operated with other than resistive load, surge voltage and/or inrush current may occur. This may potentially exceed the absolute maximum rating. This switch must be used within the specified absolute maximum rating under any situation. When use above the absolute maximum rating, the following mode may potentially occur: -worn-out on contact area due to arc discharge. -increased contact resistance due to various oxide (e.g. organic gas, siloxane) -decreased durability life due to degraded insulator.		
applied voltage of contact 接点印可電圧 flowing current 通電電流 Resistance Load 抵抗負荷 contact closed 接点閉 contact open 接点開 applied voltage of contact 接点印可電圧 max. voltage 最大電圧 max. current 最大電流 flowing Current 通電電流 Capacitor コンデンサ max. voltage 最大電圧 max. current 最大電流 Inductor インダクタ solenoid /motor ソレノイド /モーター max. voltage 最大電圧 max. current 最大電流 lamp/ Motor ランプ/ モーター max. voltage 最大電圧 max. current 最大電流 <u>in case of resistance load</u> 抵抗負荷の場合 <u>when capacitive load is included</u> 容量性負荷を含む場合 <u>when inductive load is included</u> 誘導性負荷を含む場合 <u>In case of load accompanied with great starting current</u> 大きな起動電流を伴う負荷の場合		
B2. In the circuit with bypass capacitor and/or inductor, the switch may be exposed to surge voltage and/or inrush current even for a second. Thereby, arc discharge may occur, possibly causing the mode listed in "B1". If such capacitor and/or indicator is used, a proper measure (e.g. connect resistor in series circuit) should be taken. Please verify it under the actual usage condition that any voltage and current applied to the switch is within the absolute maximum rating.		
B3. Bounce or chattering may occur, depending on the temperature conditions and/or push speed. Necessary measure (e.g. filtering in the circuit or software) must be taken to avoid malfunction due to signal noise or wrong pulse. Please verify it under the actual usage conditions that no malfunction is found.		

DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 11 / 14
BACKGROUND		DATE : Oct,2025

C. 【Mechanism design】

- C1. This switch is designed to be normally opened. This switch shall not be used as normally closed.
- C2. This switch is designed only for manual operation. This switch shall not be used for mechanical detection function. For detection function and purpose, please use detector switch.
- C3. PWB shall be free from warpage. Such PWB warpage may cause switch breakage.
- C4. If you consider using this switch for multiple applications, please use the suitable switch for each application.
- C5. Warpage of PWB may cause degraded switch characteristic.
- C6. When use a different PWB mounting hole and/or PWB footprints from our recommended dimensions, the prior consultation shall be made with us.
- C7. This switch shall not be used in a manner that the stem or the projection will get a side force. If the side of stem or projection is pushed, the switch may be broken.
- C8. This switch shall not be kept “ON” for a long time. (refer to C1.)
- C9. When this switch is used under the test condition outside this product specification, please verify it with the actual samples.
- C10. Press the center of stem, projection or metal dome. Click feeling of switch may be degraded by off-center push including stem, projection or metal dome edge due to hinge construction and/or tolerance stack-up at module level. Hinge construction may cause slant angle push, causing switch to fail to make “ON”.
- C11. Actuator Design: The actuator of set knob is recommended to be φ3 mm flat design (refer to the given figure). Also, the recommended material of actuator is ABS or PC resign.

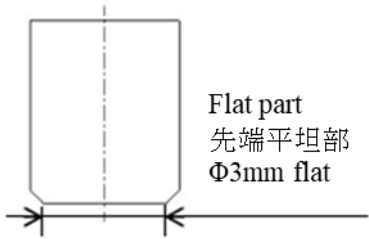

- C12. The maximum push angle of actuator shall be within 3 °.
- C13. This switch shall not be exposed to force outside the product specification (refer to “stop strength”).
- C14. Set knob shall level out to the module casing surface. Otherwise, switch may be exposed to impact force, causing breakage of switch.
- C15. This switch shall not be pressed and/or operated at any impact force. When switch is pressed at impact force, this may potentially cause damage or breakage of switch.

DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 12 / 14
BACKGROUND		DATE: Oct,2025

D. 【Usage environment】

D1. Electrical, mechanical, durability life and environmental characteristics stated in this product specification are guaranteed respectively. These characteristics are not guaranteed in combination of each test conditions. When durability life test is done under temperatures, the switch performance and/or functionality may be affected. The switch performance needs to be verified under such specific conditions under temperatures.

D2. When this switch is used in Sulfur hot-spring area and/or near exhaust gas from vehicle, the switch functionality and performance may be degraded.

D3. This switch shall not be used with the material that generate sulfide gas and oxidize gas (e.g. molded parts, rubber, adhesives. Mechanical actuator, or grease). This may cause corroded surface of the switch or increased contact resistance.

D4. This switch shall not be used with the materials that generate gas.

D5. IPx7 refers to the protection after immersion to 1 meter depth of water for 30 mins without operated under the water. IPx7 refers to the protection after immersion to 1 meter depth of water for 30 mins without operated under the water.

D6. Do not use this switch in high humidity and/or dew condensation conditions. It may cause current leakage between terminals.

D7. Water drops may flow into inside of switch, in case switch is operated and/or soaked for a long time under the condition that water drops remain on the switch body and terminals. In such case, it may cause corrosion.


D8. Materials such as adhesive, screw lock adhesive, grease/lubricants, coating, and organic solvents may potentially cause contact failure or switch breakage. Please verify it with the actual samples that such materials do not affect the switch function.

DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 13 / 14
BACKGROUND		DATE : Oct,2025

E. 【Handling for assembly】 E1. When soldering the terminals of this switch, please take the below precaution in handling. E1-1. Do not apply excessive heat to this switch. Soldering should be performed within the specified conditions. If excessive heat is applied to the switch, it may cause wobble, deformation and degraded electrical characteristic. E1-2. Do not apply a load to the terminals when soldering. It may cause wobble, deformation and electrical characteristic. E1-3. Do not use water-soluble flux for soldering. It may cause corrosion to the switch. In addition, please use flux amount proper enough to avoid flux flowing into the switch inside. E1-4. After soldering, please do not wash this switch with any solvents E1-5. When using a through-hole PWB and /or thinner one than our recommendation, heat stress will be increased. So, please verified it with the actual soldering conditions. E1-6. The bottom of this switch (at the terminal side) does not comply IP67. Upon need of dust and water protection including the bottom of switch, please use sealing or potting material to have such protection at PWB level. Do not use the sealing and potting materials that generate corrosive gas nor the materials with low viscosity to prevent such materials from flowing into inside of switch. Please verify it with the actual samples that the needed level of water protection is secured. E1-7. Setting of soldering condition shall be verified under the actual production condition. E1-8. The reflow soldering should be performed within the recommended condition. Otherwise, the click feeling may be degraded when the reflow heat is applied repeatedly. E1-9. When PWB is split in-process after soldering, do not apply a load to this switch. There is a risk of the switch deformation. E1-10. When flow soldering the backside of PWB after reflow soldering this switch, flux may flow into inside of switch along the switch housing during the wave soldering process. No through-hole on PWB shall be designed underneath or near the switch. E1-11. Design and thickness of resist on PWB may affect solderability of the switch. E1-12. No clearance between the bottom of switch and PWB surface. E1-13. Do not press the stem, the projection or the metal dome when retouching soldering to correct switch float. E2. In case ultrasonic welding is needed, such process shall be verified enough not to affect the switch functionality and performance as well as not to cause any damages. In such case, please review and use the suitable welding conditions, welding direction, and layout. E3. During the handling this switch, no force shall be applied to stem or projection of the switch. This may cause breakage. Also, the switch should not be stored in a manner that stem or projection is kept pressed. E4. The rubber stem may swell, when be exposed to oil, chemicals and so on. Rubber stem may come off and/or break. When the grease is used during your manufacturing process, rubber stem should not get such grease. In particular, organic solvents (e.g. toluene) and cyanoacrylate based adhesives largely affect rubber characteristics. Such solvents or adhesives shall not be used with this switch.
--

DOCUMENT No. SKRAAQE010	TITLE PRODUCT SPECIFICATIONS	PAGE 14 / 14
BACKGROUND		DATE : Oct,2025

- E5. When you apply chemical agents such as coating agents to this switch, please let us know beforehand.
- E6. As per the below sketch, cover tape shall be set-up free from guide plate in order to prevent switch from being caught by cover tape during the mounting process.

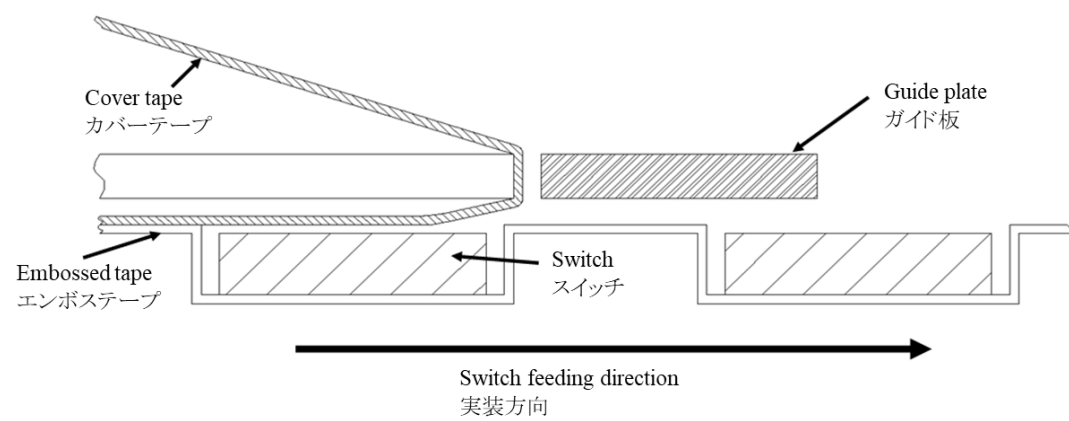

- F. 【Storage method】
- F1. This switch shall be stored in the unopened original packaging and kept at room temperature and humidity, out of direct sunlight, and away from any and all corrosive gas. The switch shall be completely used as soon as possible, but no later than 6 months from the date of delivery. Once the original packaging is opened, repack the switch in the plastic bag to avoid outer air. Then, the switch should be stored in the same way as the above.
- F2. This switch should be stored in our original packaging condition without overstocking and avoid deformation of cartoon box.