


Multi Control Devices

Switch Type

Encoder and Push Operation Type

SRBE Series

Compact, multifunctional operation device utilizing side space of the set.



- Directional resolution:-
- Ratings (max.)/(min.) (Resistive load): 1mA 5V DC/50 μ A 3V DC
- Operating temperature range:-10°C to +60°C

Applications: Game: Home handheld consoles, Virtual/augmented reality

■ Product List

Products No.	Number of detent	Number of pulse	Operating direction	Mounting method	Travel (Push operation)	Dimensions (W×D×H) (mm)	Automotive	Drawing No.
SRBE110301	12	6	Horizontal	Standard	0.2mm	8.05×11×2.35	—	1
SRBE210200	12	6	Horizontal	Low-profile	0.2mm	8.05×11×2.35	—	2


Note

1. This catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders for taping products per minimum order unit (1 reel or a case).

■ Packing Specifications


Taping

Number of packages (pcs.)			Tape width (mm)	Export package measurements (mm)
1 reel	1 case / Japan	1 case / export packing		
1,500	3,000	6,000	24	428×413×172

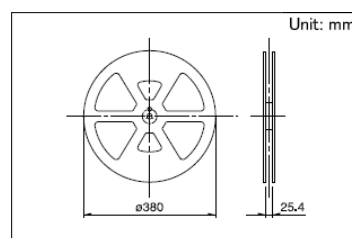


Drawing No. 1


■ Dimensions

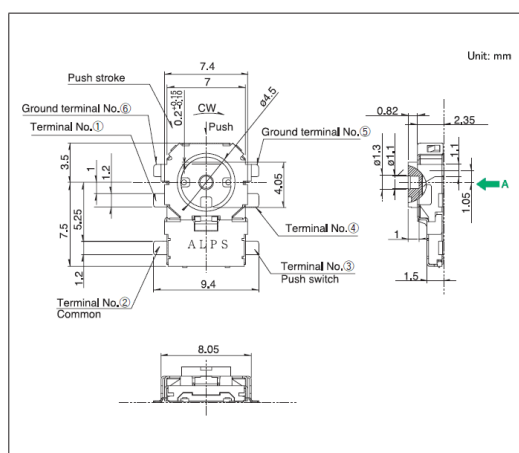

■ Land Dimensions

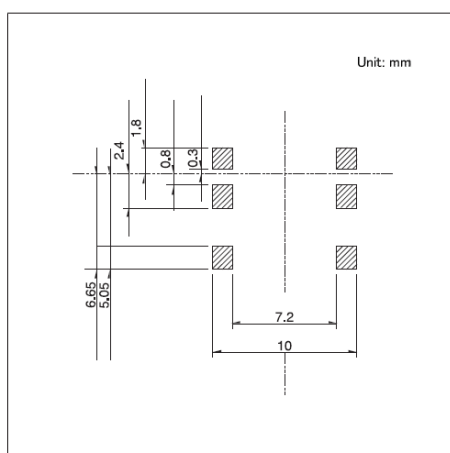


■ Circuit Diagram

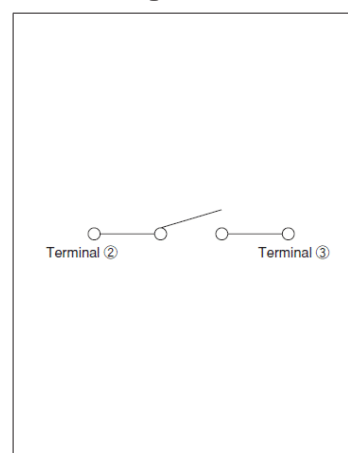


Viewed from direction A in the dimensions.

Drawing No.2


■ Dimensions

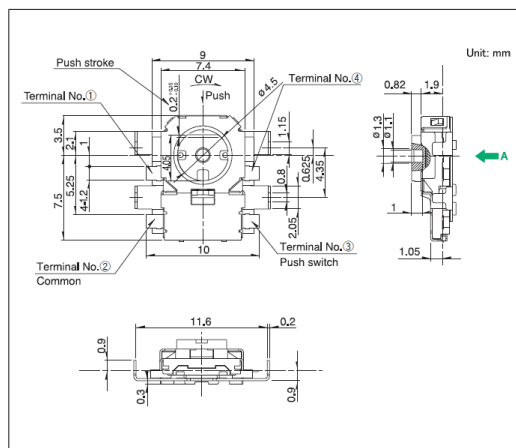

■ Land Dimensions

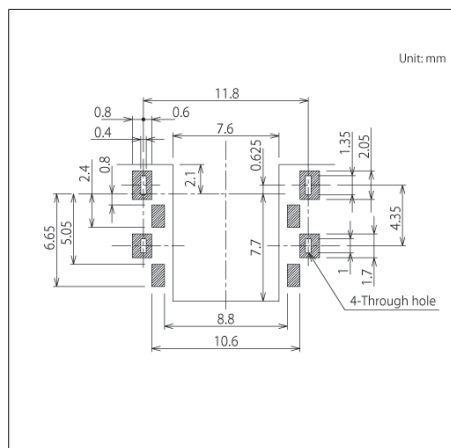

■ Circuit Diagram

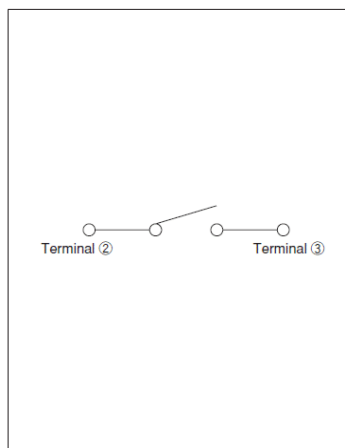

Viewed from direction A in the dimensions.