


# Potentiometers

Rotary Potentiometer (Insulated shaft type)

12mm Size Insulated Shaft Snap-in Type

## RK12L Series

Body width of 12mm, delivering high performance.

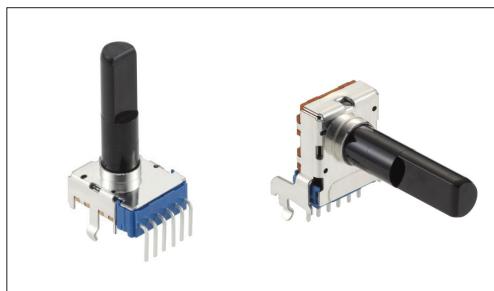

- Total resistance tolerance:  $\pm 20\%$
- Maximum operating voltage: 50V AC for AC only
- Rotational torque: 2 to 15mN·m
- Operating life: 15,000 cycles
- Operating temperature range:  $-10^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$

Applications: Home: Major home appliances, Office equipment  
Audio\_TV: Visual, Audio, Pro audio

### ■ Product List

Products No.	Number of resistor elements	Control part orientation	Shaft types	Length of the shaft LM1 (mm)	Detent	Total resistance	Resistance taper	Automotive	Drawing No.
<b>RK12L1230C1K</b>	Dual-unit	Vertical	Flat	25.0	Center detent	10k $\Omega$	1B	—	1
<b>RK12L1230C0Q</b>	Dual-unit	Vertical	Flat	25.0	Without	10k $\Omega$	1B	—	
<b>RK12L123000G</b>	Dual-unit	Vertical	Flat	30.0	Center detent	10k $\Omega$	1B	—	2
<b>RK12L1230A08</b>	Dual-unit	Vertical	Flat	30.0	Without	10k $\Omega$	1B	—	
<b>RK12L1210C1T</b>	Dual-unit	Horizontal	Flat	30.0	Center detent	10k $\Omega$	1B	—	3
<b>RK12L1210C0V</b>	Dual-unit	Horizontal	Flat	30.0	Without	10k $\Omega$	1B	—	
<b>RK12L12C0A0E</b>	Dual-unit	Vertical	Flat	25.0	Without	10k $\Omega$	15A	—	1
<b>RK12L12C0A0G</b>	Dual-unit	Vertical	Flat	30.0	Without	10k $\Omega$	15A	—	2
<b>RK12L12A0C0R</b>	Dual-unit	Horizontal	Flat	30.0	Without	10k $\Omega$	15A	—	3

### ⚠ Note

1. This catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders per minimum order unit (integer).
3. Products other than those listed in above products are also available. Please contact us for details.

### ■ Packing Specifications

Tray

Number of packages(pcs.)		Export package measurements (mm)
1 case / Japan	1 case / export packing	
800	1,600	543 x 377 x 250

