

Potentiometers

Slide Potentiometer (Master type)

Low-profile Master Type (Super P Fader)

RS6011*P Series

Compact design with excellent operation feel, ideal for mixer faders.



- Total resistance tolerance: $\pm 20\%$
- Operating life: 30,000 cycles
- Operating temperature range: -10°C to $+60^{\circ}\text{C}$

Applications: Audio_TV: Pro audio

Product List

Products No.	Number of resistor elements	Direction of lever	Travel (mm)	Lever type	Length of lever (mm)	Total resistance	Resistance taper	Maximum operating voltage	Automotive	Drawing No.
RS6011SP6003	Single-unit	Vertical	60	6	15	10k Ω	1B	200V AC, 10V DC	—	1
RS6011SP6004	Single-unit	Vertical	60	6	15	20k Ω	15A	200V AC, 10V DC	—	
RS6011DP6002	Dual-unit	Vertical	60	6	15	10k Ω	15A	150V AC, 10V DC	—	2
RS6011DP6003	Dual-unit	Vertical	60	6	15	20k Ω	15A	150V AC, 10V DC	—	

Note

1. This catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Place your purchase order in N minimum package units (N: integer).
3. Products other than those listed in above products are also available. Please contact us for details.
4. Please read "Lever Types" for the kinds and code of lever type.

Lever Types

Configuration code	9-1 (Metal lever)	6 (Metal lever)	4 (Metal lever)	Unit:mm
Dimensions				
Length L ₁	10	15	15	20


Packing Specifications

Tray


Number of packages(pcs.)		Export package measurements (mm)
1 case / Japan	1 case / export packing	
900	900	529 x 373 x 273

Drawing No.1


■ Dimensions

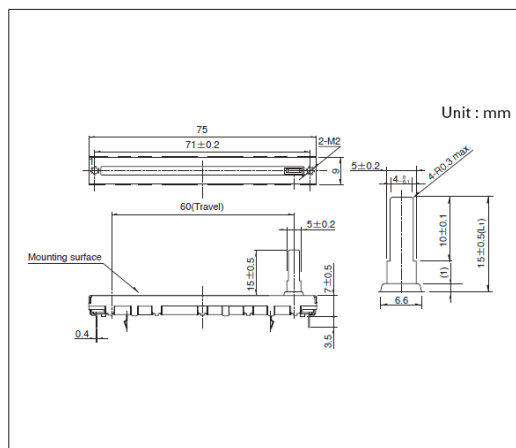

■ Mounting Hole Dimensions

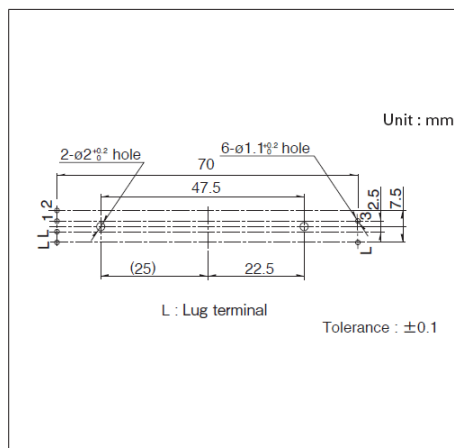


■ Terminal Layout / Circuit Diagram

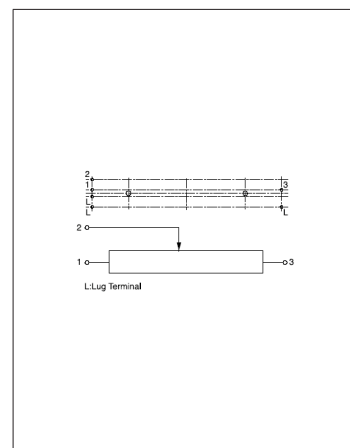


1. Viewed from mounting side.
2. Lug terminals for terminals 1' 2' 3'.

Drawing No.2


■ Dimensions

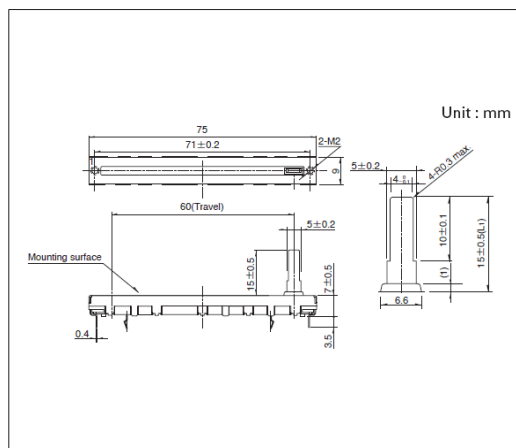

■ Mounting Hole Dimensions

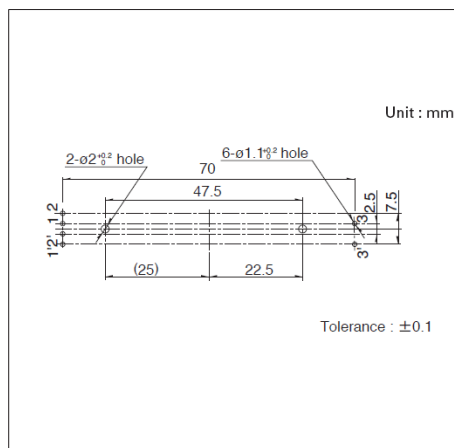

■ Terminal Layout / Circuit Diagram

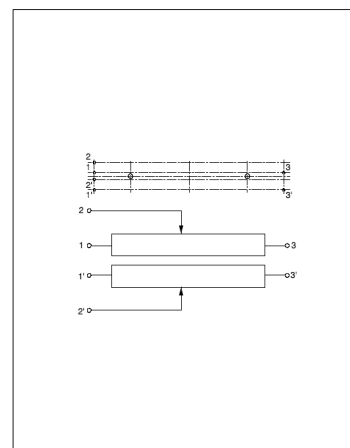

Viewed from mounting side.