

Delivers excellent operation feel and high-speed tracking during motor-driven operation.




- Applications:Audio_TV:Pro audio

Products No.	Number of resistor elements	Direction of lever	Travel (mm)	Length of lever (mm)	Total resistance	Resistance taper	Terminal style	Maximum operating voltage	Automotive	Drawing No.
RSA0V11M9002	Single-unit	Vertical	100	10.95	10kΩ	1B	Connector	500V AC, 10V DC	—	1



Number of packages(pcs.)		Export package measurements (mm)
1 case / Japan	1 case / export packing	
80	80	540 x 360 x 205

■ Dimensions

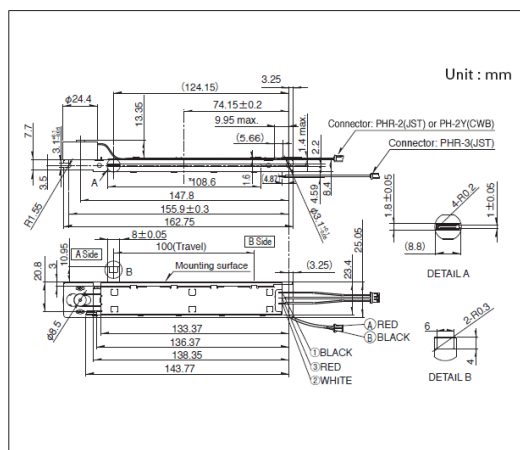

The diagram shows a motor labeled 'M' connected to two contacts, A and B. Contact A is marked with a '+' sign and contact B with a '-' sign. A wavy line labeled 'a' indicates the moving direction of the lever and contacts. Below this, two horizontal lines represent the lever and contacts, with 'A = +' on the top line and 'B = +' on the bottom line. Arrows indicate the moving direction of the lever and contacts, with '100% ③' at the left end and '① 0%' at the right end.