


开关

滑动开关

0.9 (H) mm, 单侧・两侧弹回

SSAG系列

满足向小型、薄型化发展的长寿命型

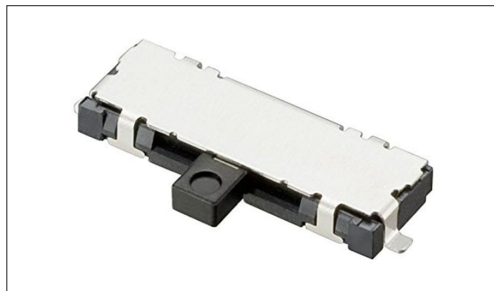

- 最大额定/最小额定 (电阻负载): 10mA 5V DC/50 μ A 3V DC
- 接触电阻 (初期/寿命后): 200m Ω max./500m Ω max.
- 无负载寿命: 100,000 cycles 500m Ω max. (Recoil side)
30,000 cycles 500m Ω max. (Lock side)
- 负载寿命 (最大额定负载): 100,000 cycles 500m Ω max. (Recoil side)
30,000 cycles 500m Ω max. (Lock side)

主要用途: Mobile: 智能手机, 平板电脑, 头戴式耳机, 可穿戴的, 笔记本电脑&周边设备
 Energy_Industrial: 机器人, 无人机, 工业设备, 转换器
 Game: 家庭用便携设备, VR, AR
 Healthcare: 健康器具, 介护器具, 分析, 检查器具
 Audio_TV: 音响, 闪光灯

■ 产品一览

产品编号	操作部方向	行程 (mm)	电路数	接点数	动作力	切换时限	焊接方法	操作	框脚形状	定位销	外形尺寸 (W×D×H) (mm)	汽车用	图号
SSAG130100	Horizontal	1.5	1	3	1N (Recoil side), 1.5N (Lock side)	Not specified	Reflow	Left-side recoil	For PC board insert	Without	3.0×9.05×1.15	—	1
SSAG130200	Horizontal	1.5	1	3	1N (Recoil side), 1.5N (Lock side)	Not specified	Reflow	Left-side recoil	For PC board insert	With	3.0×9.05×1.15	—	2
SSAG130300	Horizontal	1.5	1	3	1N (Recoil side), 1.5N (Lock side)	Not specified	Reflow	Left-side recoil	Flat	Without	3.0×9.05×1.15	—	3
SSAG130400	Horizontal	1.5	1	3	1N (Recoil side), 1.5N (Lock side)	Not specified	Reflow	Left-side recoil	Flat	With	3.0×9.05×1.15	—	4
SSAG230100	Horizontal	1.5	1	3	1N (Recoil side), 1.5N (Lock side)	Not specified	Reflow	Right-side recoil	For PC board insert	Without	3.0×9.05×1.15	—	5
SSAG230200	Horizontal	1.5	1	3	1N (Recoil side), 1.5N (Lock side)	Not specified	Reflow	Right-side recoil	For PC board insert	With	3.0×9.05×1.15	—	6
SSAG230300	Horizontal	1.5	1	3	1N (Recoil side), 1.5N (Lock side)	Not specified	Reflow	Right-side recoil	Flat	Without	3.0×9.05×1.15	—	7
SSAG230400	Horizontal	1.5	1	3	1N (Recoil side), 1.5N (Lock side)	Not specified	Reflow	Right-side recoil	Flat	With	3.0×9.05×1.15	—	8
SSAG330100	Horizontal	1.5	1	3	1N (Recoil side)	Not specified	Reflow	Double-side recoil	For PC board insert	Without	3.0×9.05×1.15	—	9
SSAG330200	Horizontal	1.5	1	3	1N (Recoil side)	Not specified	Reflow	Double-side recoil	For PC board insert	With	3.0×9.05×1.15	—	10
SSAG330300	Horizontal	1.5	1	3	1N (Recoil side)	Not specified	Reflow	Double-side recoil	Flat	Without	3.0×9.05×1.15	—	11
SSAG330400	Horizontal	1.5	1	3	1N (Recoil side)	Not specified	Reflow	Double-side recoil	Flat	With	3.0×9.05×1.15	—	12


⚠ 注

1. 本产品目录上的产品信息为粗略规格。请在使用前交换正式交付规格。
2. 关于载带品的试制数量, 请以最小订货单位 (1卷, 1箱) 的N倍订货。

■ 包装规格

载带

包装数 (pcs.)			载带宽度 (mm)	出口包装箱尺寸 (mm)
1卷	1箱/日本	1箱/出口包装		
4,000	8,000	16,000	24	428 x 413 x 172

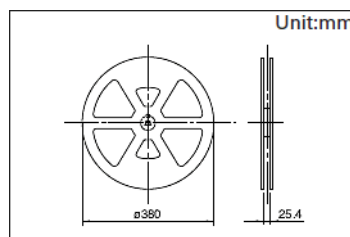


开关 滑动开关


0.9 (H) mm, 单侧·两侧弹回
SSAG系列

图号4


■ 外形图

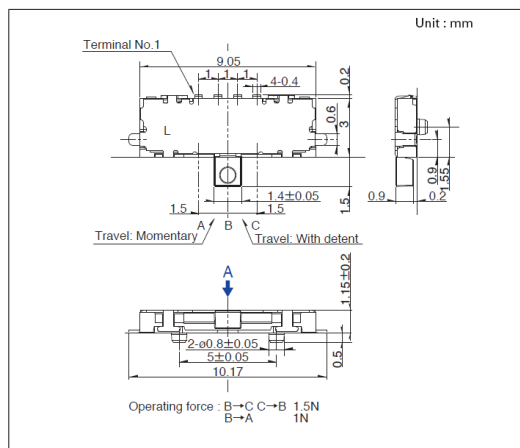

■ 焊接处尺寸图

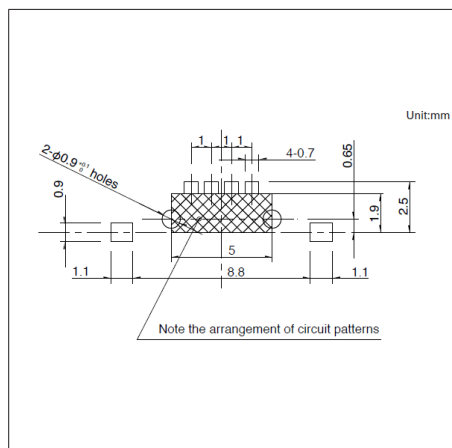


■ 电路图

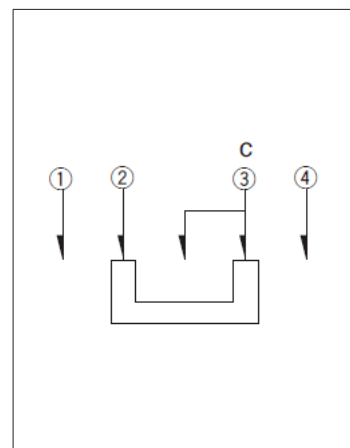


自A方向看。

图号5


■ 外形图

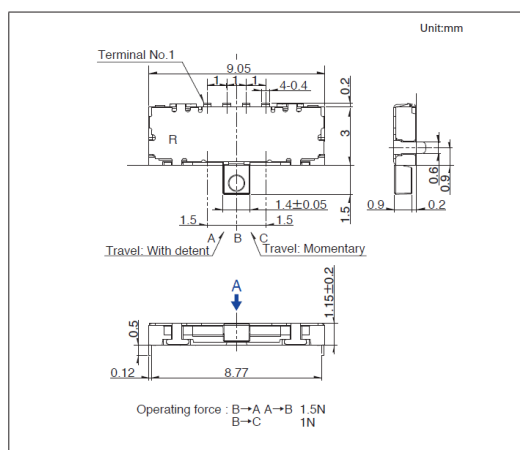

■ 焊接处尺寸图

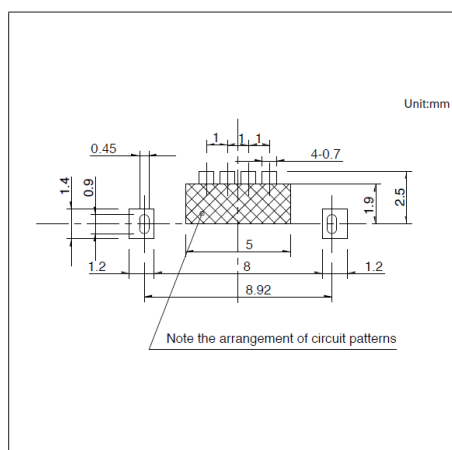


■ 电路图

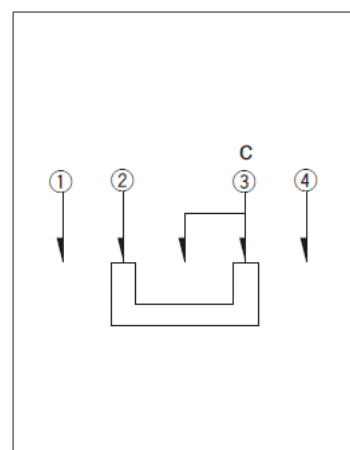


自A方向看。

图号6


■ 外形图

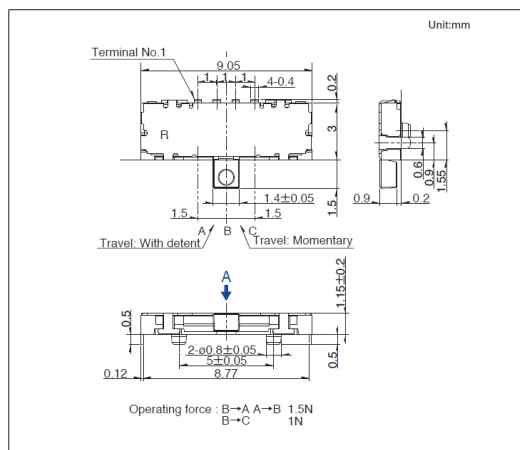

■ 焊接处尺寸图

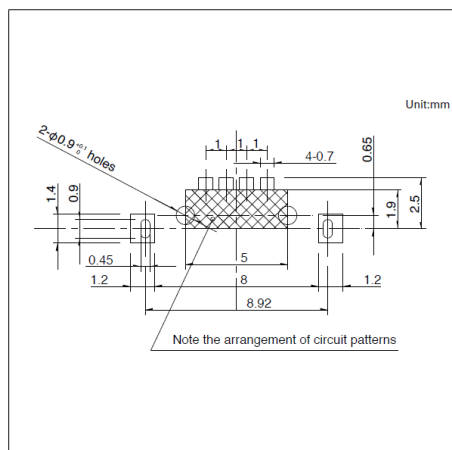

■ 电路图

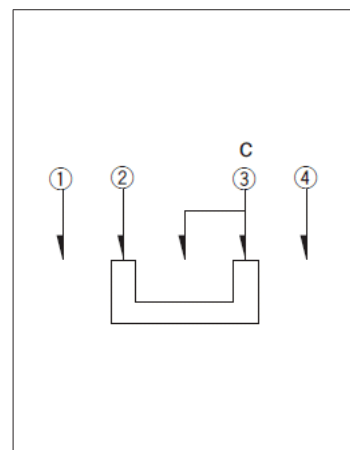


自A方向看。

开关 滑动开关


0.9 (H) mm, 单侧·两侧弹回
SSAG系列

图号7


■ 外形图

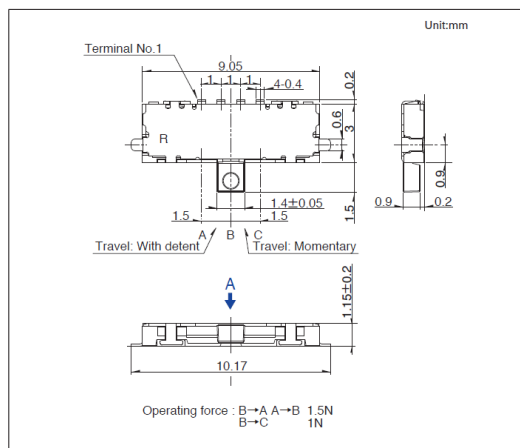

■ 焊接处尺寸图

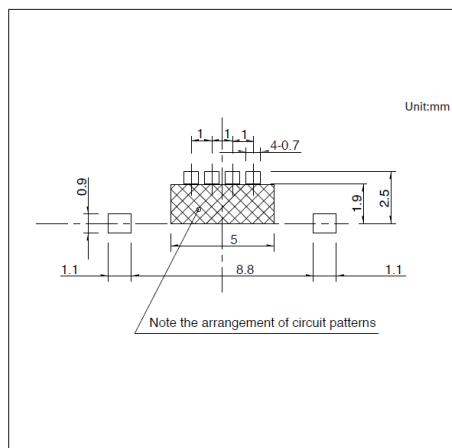


■ 电路图

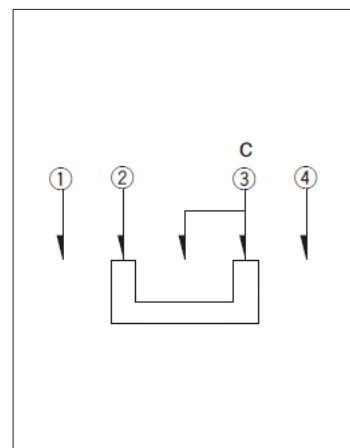


自A方向看。

图号8


■ 外形图

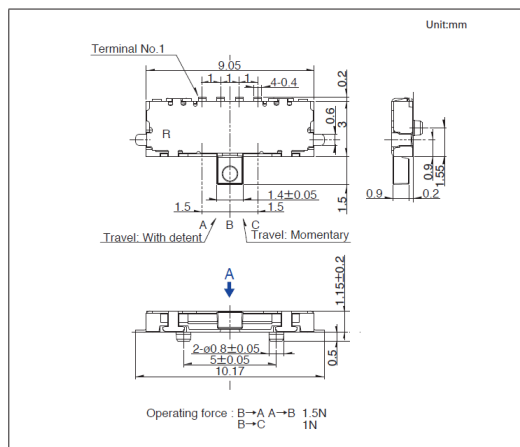

■ 焊接处尺寸图

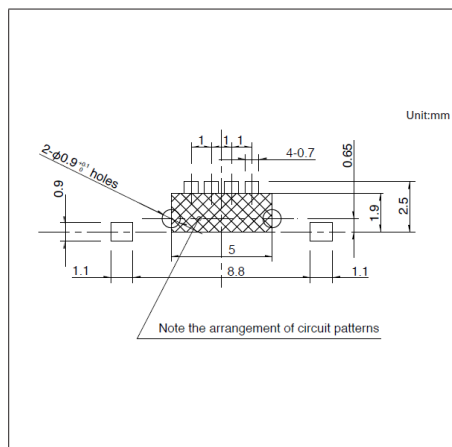


■ 电路图

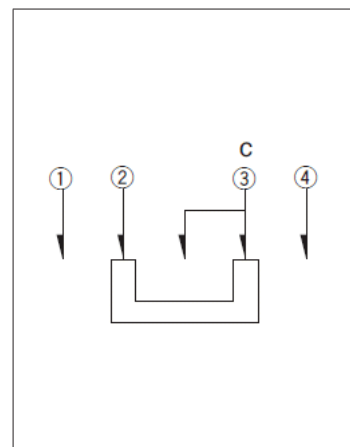


自A方向看。

图号9


■ 外形图

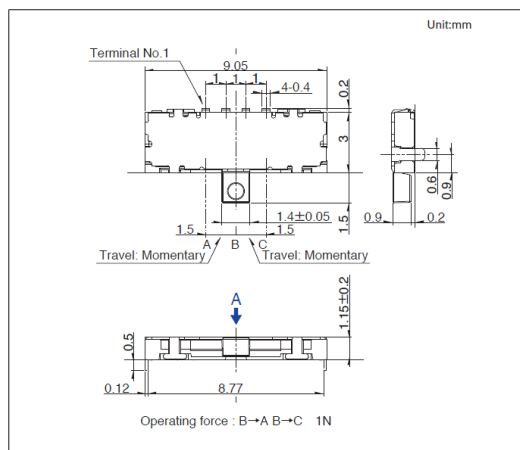

■ 焊接处尺寸图

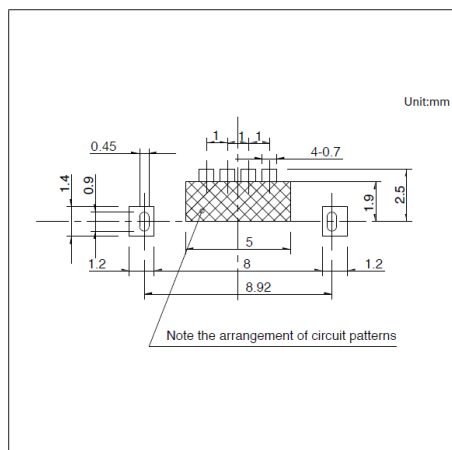

■ 电路图

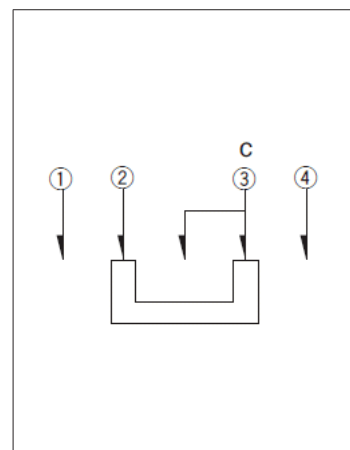


自A方向看。

开关 滑动开关


0.9 (H) mm, 单侧·两侧弹回
SSAG系列

图号10


■ 外形图

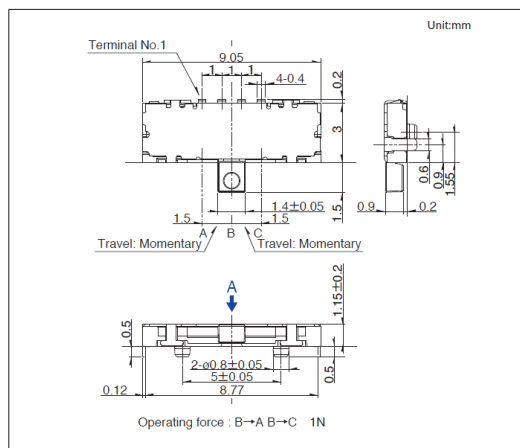

■ 焊接处尺寸图

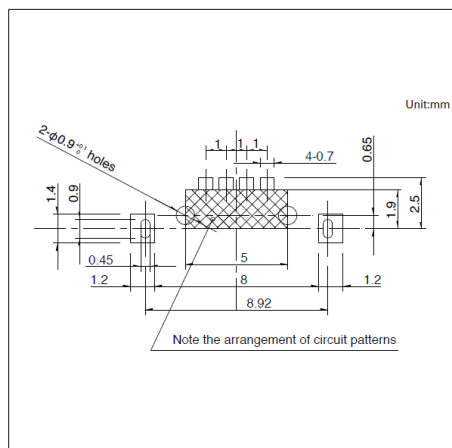


■ 电路图

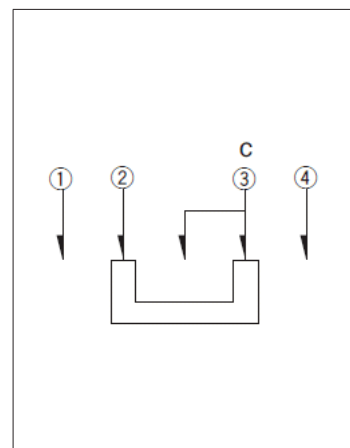


自A方向看。

图号11


■ 外形图

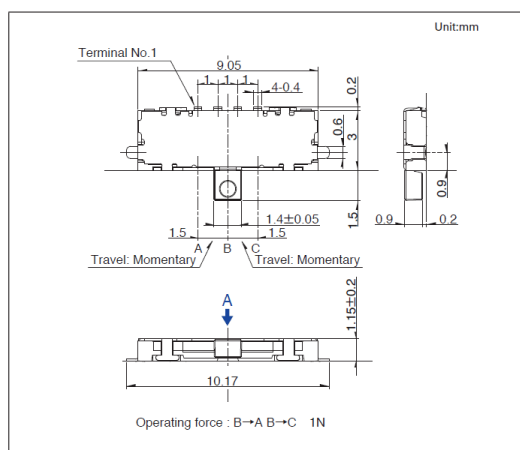

■ 焊接处尺寸图

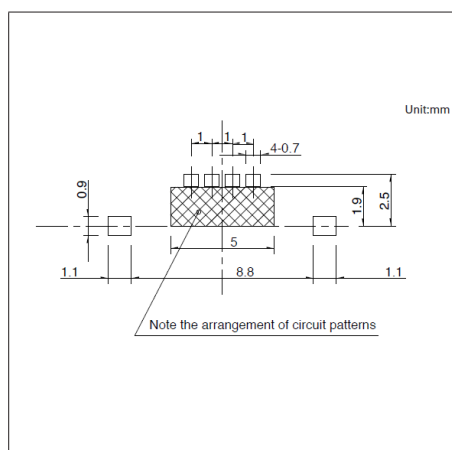


■ 电路图

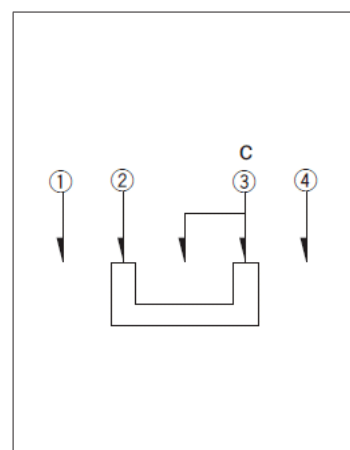


自A方向看。

图号12


■ 外形图

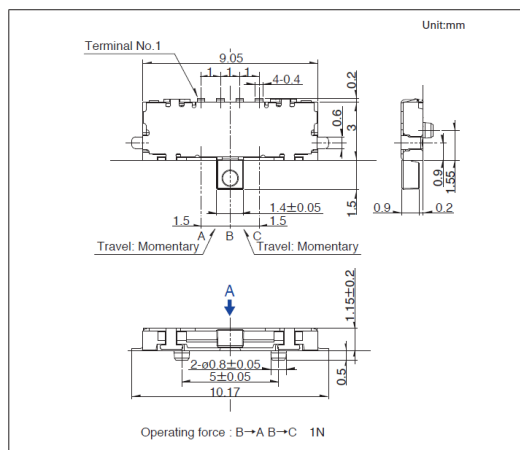

■ 焊接处尺寸图

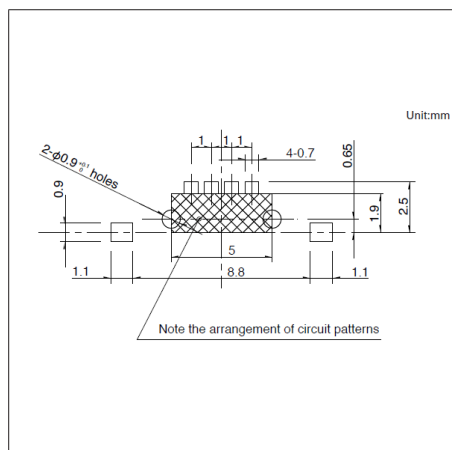

■ 电路图

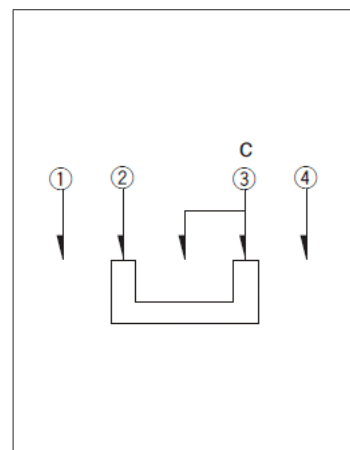

自A方向看。