

开关

按动开关

2.5mm行程卧式大型
SPUN系列

也备有适用于多回路、中电流的产品



- 最大额定/最小额定 (电阻负载) : 0.1A 30V DC/50 μ A 3V DC (Standard)
1A 25V DC/ - (Medium-current)
- 接触电阻(初期/寿命后) : 20m Ω max./40m Ω max.
- 无负载寿命 : 30,000 cycles 40m Ω max. (Standard)
10,000 cycles 40m Ω max. (Medium-current)
- 负载寿命 (最大额定负载) : 10,000 cycles 40m Ω max. (Standard)
5,000 cycles 40m Ω max. (Medium-current)

主要用途 : Audio_TV : 音响

■ 产品一览

产品编号	行程 (mm)	全行程 (mm)	额定	电路数	动作力	切换时限	安装方法	动作	端子形状	外形尺寸 (W×D×H) (mm)	汽车用	图号
SPUN191400	2.5	3.5	Standard	2	2±1N	Non shorting	PC board	Latching	Straight	24.0×10.0×13.0	—	1
SPUN191600	2.5	3.5	Standard	2	2±1N	Non shorting	PC board	Latching	Snap-in	24.0×10.0×13.0	—	2
SPUN190900	2.5	3.5	Standard	2	2±1N	Non shorting	PC board	Momentary	Straight	24.0×10.0×13.0	—	1
SPUN191000	2.5	3.5	Standard	2	2±1N	Non shorting	PC board	Momentary	Snap-in	24.0×10.0×13.0	—	2
SPUN194700	2.5	3.5	Standard	4	2.5±1N	Non shorting	PC board	Latching	Straight	24.0×10.0×13.0	—	3
SPUN194900	2.5	3.5	Standard	4	2.5±1N	Non shorting	PC board	Latching	Snap-in	24.0×10.0×13.0	—	4
SPUN192600	2.5	3.5	Medium-current	2	3±1.5N	Non shorting	PC board	Latching	Straight	24.0×10.0×13.0	—	5
SPUN192800	2.5	3.5	Medium-current	2	3±1.5N	Non shorting	PC board	Latching	Snap-in	24.0×10.0×13.0	—	2
SPUN19C400	2.5	3.5	Medium-current	4	4±2N	Non shorting	PC board	Latching	Snap-in	24.0×10.0×13.0	—	4



注

1. 本产品目录上的产品信息为粗略规格。请在使用前交换正式交付规格。
2. 请以最小订购单位的N(整数) 倍来订货。

■ 包装规格

散装

产品编号	包装数 (pcs.)		出口包装箱尺寸 (mm)
	1箱/日本	1箱/出口包装	
SPUN191400 SPUN191600 SPUN190900 SPUN191000 SPUN192600 SPUN192800	250	1,250	400 x 270 x 290
SPUN194700 SPUN194900 SPUN19C400	140	700	400 x 270 x 290


开关

拨动开关


2.5mm行程卧式大型
SPUN系列

图号1


■ 外形图

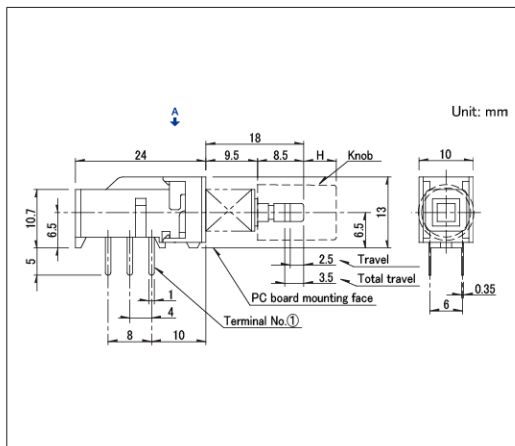

■ 安装孔尺寸图

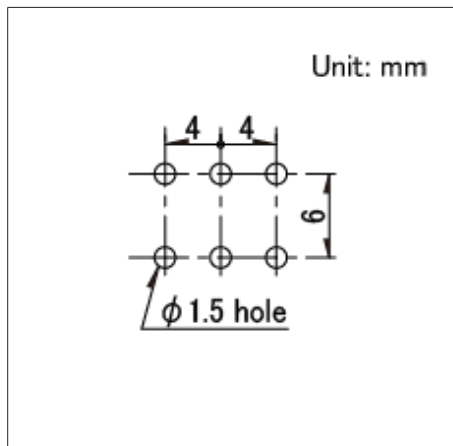


■ 电路图

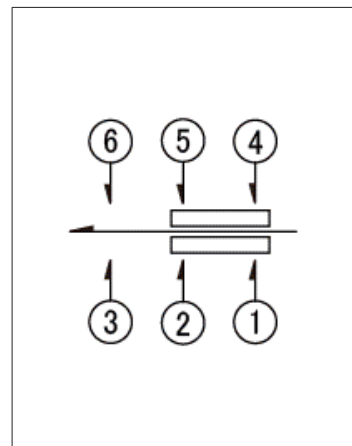


自A方向看

图号2


■ 外形图

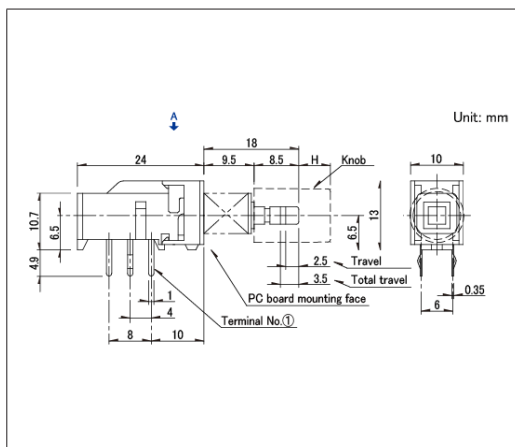

■ 安装孔尺寸图

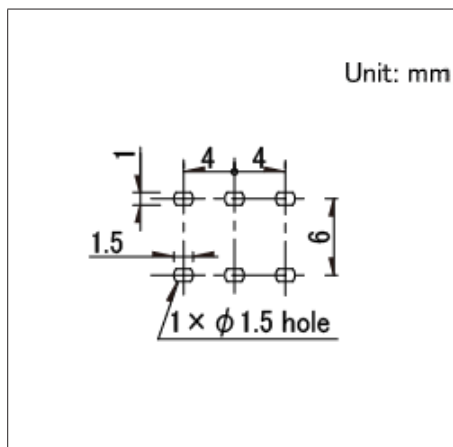


■ 电路图

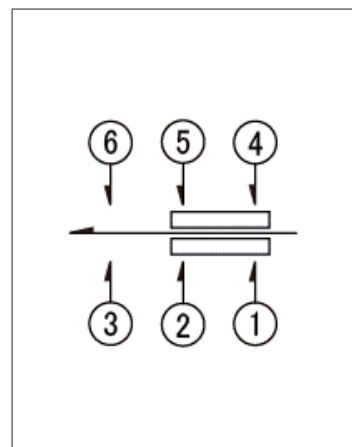


自A方向看

图号3


■ 外形图

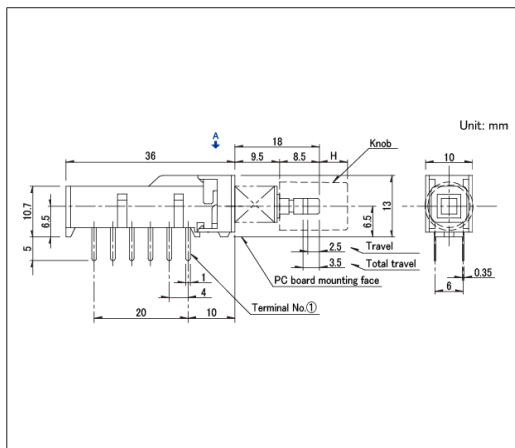

■ 安装孔尺寸图

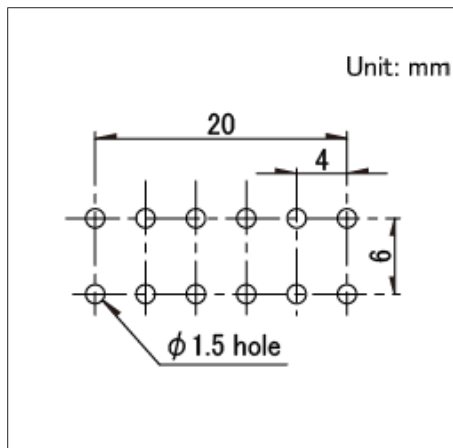

■ 电路图

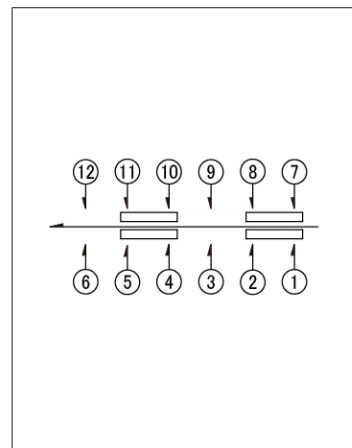

自A方向看

