



最大可支持10个档位的模式切换开关



- 主要用途: Healthcare: 健康器具
Audio_TV: 闪光灯

产品编号	电路数	接点数	切换角度	定位数	定位销	切换时限	旋转扭矩	焊接方法	操作部长度	外形尺寸 (W×D×H) (mm)	汽车用	图号
SRBD150201	1	10	36°	5	有	Non shorting	13±5mN·m	For PC borrd (Reflow)	1.7mm	10.0×10.0×1.7	—	1
SRBD170401	1	10	36°	7	无	Non shorting	13±5mN·m	For PC borrd (Reflow)	1.7mm	10.0×10.0×1.7	—	2
SRBD180201	1	10	36°	8	有	Non shorting	13±5mN·m	For PC borrd (Reflow)	1.7mm	10.0×10.0×1.7	—	3
SRBD110401	1	10	36°	10	有	Non shorting	13±5mN·m	For PC borrd (Reflow)	1.7mm	10.0×10.0×1.7	—	4

包装数 (pcs.)			载带宽度 (mm)	出口包装箱尺寸 (mm)
1卷	1箱/日本	1箱/出口包装		
1,200	2,400	4,800	24	428 x 413 x 172

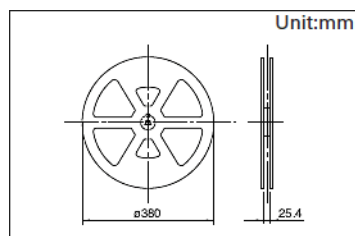

Unit: mm

Top View: 10, 2.8, 12, 18, 23

Side View: 1.55, 0.4, 3.4, 1.7

Detail View: 0.8, 2.10, 12-0.35, 9-1

Unit: mm

Technical drawing of a diamond-shaped plate with the following dimensions and features:

- Overall width: 12-1.05
- Overall height: 10.6
- Top-left corner chamfer: 0.65
- Top-left corner radius: 12-0.75
- Top-left corner thickness: 3
- Top-left corner hole diameter: $\phi 1.05$
- Top-left corner hole position: 1
- Top-left corner hole diameter: $\phi 1.5$ hole
- Top-left corner hole position: 4.1.8
- Top-left corner hole diameter: $\phi 1.05$
- Top-left corner hole position: 5.3
- Top-left corner hole diameter: $\phi 1.05$
- Top-left corner hole position: 7.6
- Top-left corner hole diameter: $\phi 1.05$
- Top-left corner hole position: 2.9.4
- Top-left corner hole diameter: $\phi 1.05$
- Top-left corner hole position: 2.11
- Top-left corner hole diameter: $\phi 1.05$
- Top-left corner hole position: 45°
- Top-left corner hole diameter: $\phi 1.05$
- Top-left corner hole position: 45°

ALPSALPINE


开关

旋转开关


大扭矩触压式薄型
SRBD系列

图号2


■ 外形图

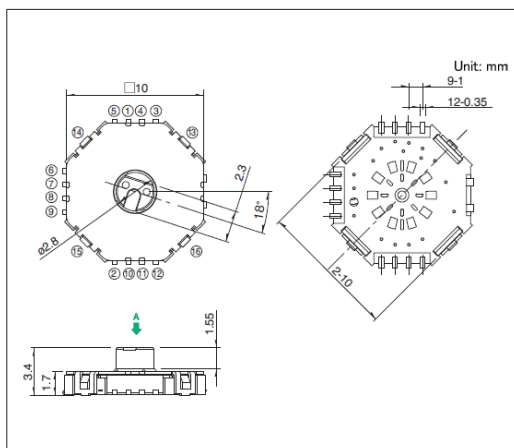

■ 焊接处尺寸图

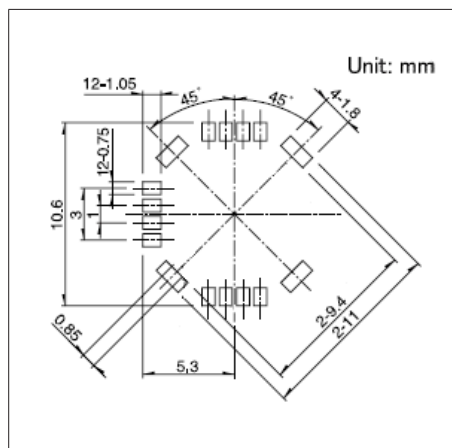


■ 电路图

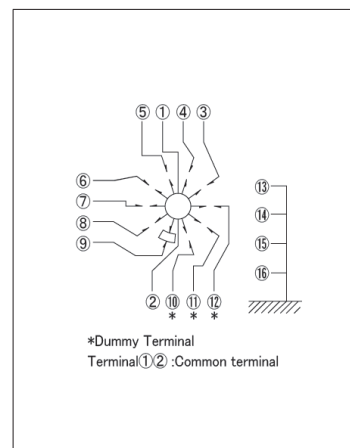


自A方向看

图号3


■ 外形图

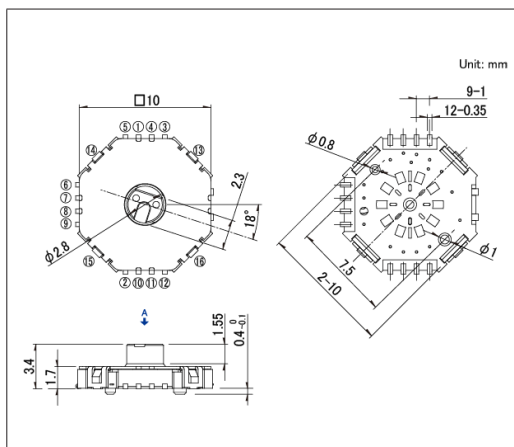

■ 焊接处尺寸图

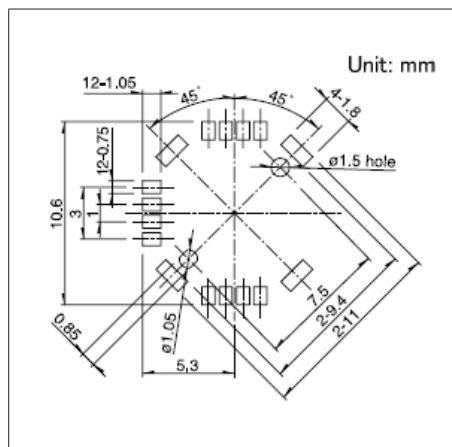


■ 电路图

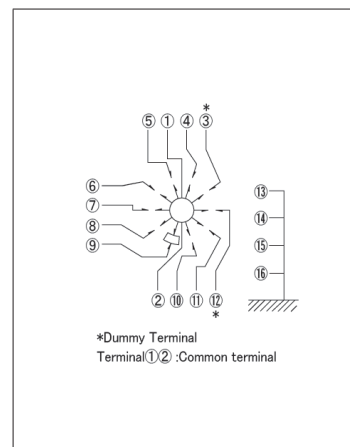


自A方向看

图号4


■ 外形图

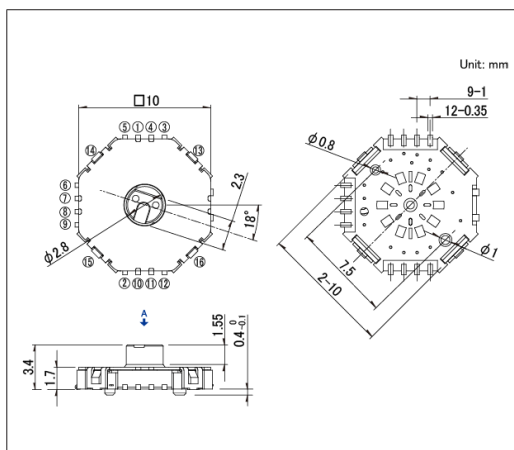

■ 焊接处尺寸图

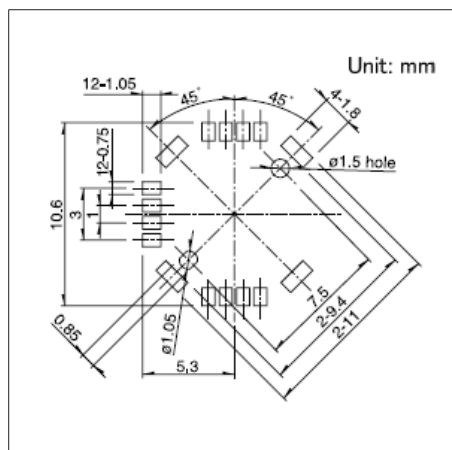

■ 电路图

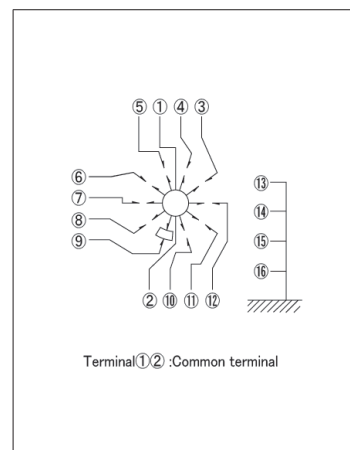

自A方向看