


TACT Switch™ Surface Mount Type

6.1mm Square (Surface Mount) SKTR Series

Quiet mid-stroke type with reliable operation feel and dust-proof performance (IP6X equivalent).



Automotive

Dust-proof Type

- Series type: Sharp feeling type
- Absolute Maximum Ratings: 50mA 16V DC
- Rating (min.): 10μA 1V DC

Applications: Automotive: Navigation/audio systems, HVAC,
Overhead consoles, Steering, Shifter

■ Product List

Products No.	Operating direction	Operating force (N)	Click type	Travel (mm)	Operating life (cycles)	Initial contact resistance	Dimensions (W×D×H) (mm)	Water-proof	Dust-proof	Water-proof & Dust-proof	Automotive	Drawing No.
SKTRAEE010	Top push	3.8	Standard	0.72	200,000	500mΩ max.	6.1×6.1×4.1	—	●	IP6X equivalent	●	1
SKTRAEE010	Top push	4.0	Low click	0.78	200,000	500mΩ max.	6.1×6.1×4.1	—	●	IP6X equivalent	●	
SKTRAGE010	Top push	3.0	Low click	0.75	200,000	500mΩ max.	6.1×6.1×4.1	—	●	IP6X equivalent	●	


⚠ Note

1. This catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders for taping products per minimum order unit (1 reel or a case).

■ Packing Specifications


Taping

Number of packages (pcs.)			Tape width (mm)	Export package measurements (mm)
1 reel	1 case / Japan	1 case / export packing		
2,500	25,000	25,000	12	395 x 395 x 205




Drawing No. 1


■ Dimensions

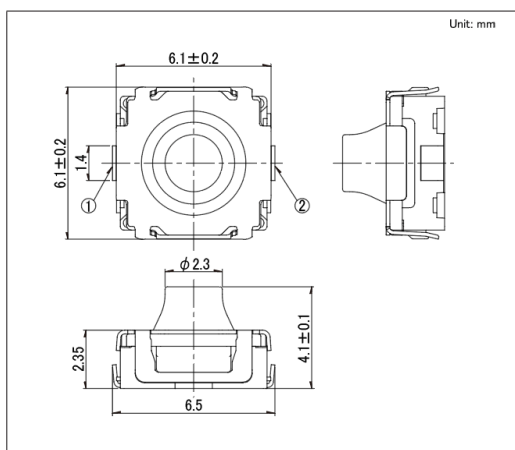

■ Land Dimensions

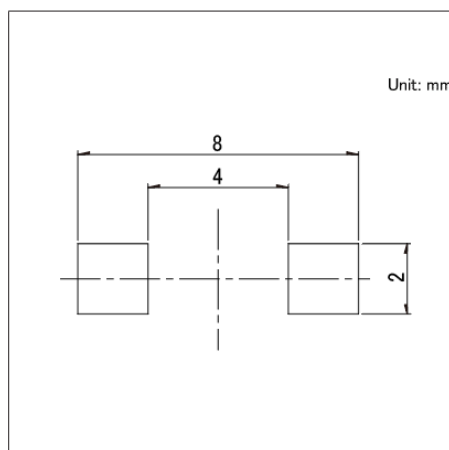

■ Circuit Diagram

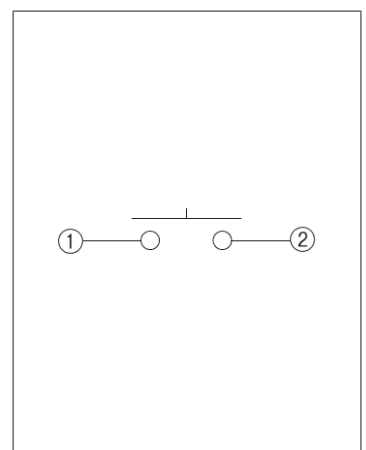

Viewed from switch mounting face